SCOTT COAST
ROSS DEPENDENCY – ANTARCTICA

RELIEF INLET

MT MELBOURNE SS 58–60, 9

PROVISIONAL EDITION
SS 58–60, 13 1 : 250,000

REFERENCE

- U.S. & N.Z. Astronomical Station
- U.S. Tellurometer Station (occupied)
- U.S. Intersected Station
- N.Z. Astronomical Station
- Trig Station
- Intersected or resected points
- Principal points of trimetrogen aerial photographs
- Mission & Run — Mission 4A Run 3
- Ice-free land
- Ice covered land
- Glaciers and allied ice
- Ridge lines
- Glacier front
- Moraine, Scree
- Crevassed areas
- Icefalls
- Cliffs or bluffs
- Coastline definite
- Coastline indefinite
- Height in Metres — 3500
- Routes taken by field parties

LOCALITY DIAGRAM

Ross Dependency boundary shown

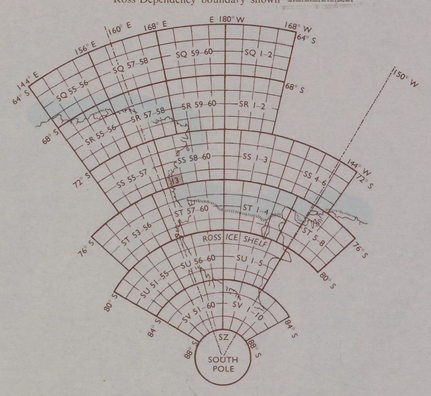

Sheet lines based on I.M.W. series.

SCALE

1 : 252,906 at 75° 30′ S. Lat.

Statute Miles: 10 0 10 20

Kilometres: 10 0 10 20 30 40

Nautical Miles: 10 0 10 20

Crown Copyright Reserved

Published by the Dept., of Lands & Survey, N. Z.
under the authority of R. P. Gough, Surveyor General.

R. E. Owen, Government Printer, Wellington, New Zealand.

COMPILATION

Compiled from ground surveys by:
Magnetic Pole Expedition 1908
1910–13 Expedition – Northern Party
New Zealand Geological & Survey Antarctic Expedition 1962–63
Southern Party
Leader Surveyor R. W. Hewson

and aerial photography:
Aerial photography supplied by U.S. Geological Survey and flown by U.S. Navy Vx–6 Squadron.

RELIABILITY

The positions of U.S. Geological Survey tellurometer traverse stations, established in 1961-62 in terms of Camp Area datum (Lat. 77° 50′ 52″·5 Long. 166° 40′ 13″·7) have been adopted for overall control purposes.

(1) N.Z. control stations have been fixed by astro observations and triangulation, adjusted to agree with one another and with the U.S.G.S. tellurometer traverse stations. Other points have been fixed by intersecting rays and photo theodolite panoramas from these control stations.

Additional details of ice formation and land form have been obtained from photo-theodolite panoramas and from U.S. aerial photography.

Heights have been determined by theodolite and aneroid barometer, checked against barometric readings supplied by support aircraft, and, where necessary, adjusted to agree with the heights of U.S.G.S. tellurometer traverse stations (datum: Mean sea level, McMurdo).

(2) Detail from U.S. aerial photography based on available limited control.

RELIABILITY DIAGRAM



PROJECTION

Polar Stereographic with Scale 1 : 250,000 at standard parallel 71° S. Lat.

1ST EDITION
NOV 1965

Refer to this map as:—
NZMS 166
SHEET
SS 58–60, 13